

TM42T

TRAILER MOUNTED WORK PLATFORM



42ft Platform height

25ftWorking outreach

Telescopic Upper Boom

Greater accuracy when positioning platform

Bi-Energy Optimizing utilization

Hydraulic OutriggersFor quick and easy setup

Fully Proportional Hydraulic Controls

Simple, reliable & easy to maintain

Traction Drive Option

For improved maneuverability on site










Developed specifically to maximize outreach at lower levels, the Nifty **TM42T** delivers unrivaled performance. Its compact dimensions and hydraulic outriggers make maneuvering and setting up both quick and easy and its spacious 4ft 7in wide platform provides the operator plenty of room to work. Operation and maintenance are also made simple, due to fully proportional hydraulic controls minimizing both downtime and running costs.

SAFETY FEATURES

- Cage Overload Sensing
- Pressure Sensitive Outriggers
- Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- Meets OSHA and ANSI regulations

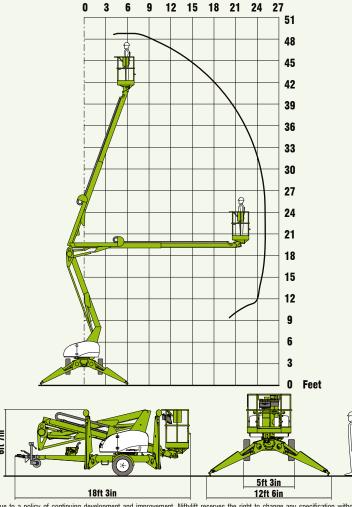

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.



The **TM42T** offers an up and over clearance of more than 18ft 4in allowing it to easily reach over larger obstacles such as walls and buildings.

Fully proportional controls and a spacious platform make the **TM42T** simple to operate with both speed and accuracy.



SPECIFICATIONS

Working Height	48ft 6in
Platform Height	42ft
Working Outreach	25ft
Slew	400°
Width - Traveling	5ft 3in
- Working	12ft 6in
Height	6ft 7in
Length	18ft 3in
Weight	3,800lbs*
Platform Capacity	500lbs
Platform Size	4ft 7in x 2ft 4in
Control System	Fully Proportional Hydraulic
Power System	Mains Only
	Battery Only
	Gas or Diesel Only
	Bi-Energy (Engine & Battery)
Drive Option	Traction Drive

^{*} Weights may vary according to specification / power options, please confirm before ordering.

Supplied by:

NIFTYLIFT INC

32 Concourse Way, Greer, SC 29650 USA

Sales: 1-800-NIFTYLIFT (800-643-8954) Office: 1-877-MYNIFTY (877-696-4389)

Fax: 1-864-968-8836 e.mail: info@niftylift.com www.niftylift.com

NIFTYLIFT LTD

Fingle Drive, Stonebridge Milton Keynes, MK13 0ER England, United Kingdom Tel.: +44 (0)1908 223456 Fax.: +44 (0)1908 312733 e.mail: info@niftylift.com www.niftylift.com